


Cat6 UTP Keystone Jack

InBERG Cat6 Keystone Jack

InBERG Cat.6 UTP Keystone Jack offers exceptional performance that will support 5GBASE-T Ethernet with complete reliability. Our Keystone Jacks are suitable to be assembled with the InBERG unloaded Patch Panels and faceplates for the wall outlet.

Our Cat.6 keystone jacks are designed to support any data or voice protocol that is capable of running over a Cat.6 cabling system and backward compatible with the existing network infrastructure.

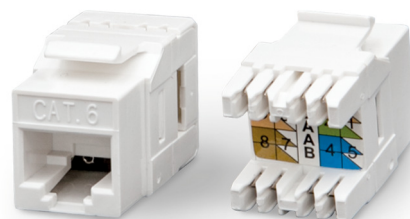

Specification for Cat6 Keystone jack:

Standard	ISO/IEC 11801 & TIA/EIA 568-C
Electrical	Voltage Rating : 125 VAC
	Current Rating : 1.5AMP
	Contact Resistance : 20 MILLIOHMS MAX
	Insulation Resistance : 1000 MEGOHMS MIN@500VDC
Environmental	Dielectric Strength : 750 VAC RMS 60Hz ,1 MIN
	Storage : -40~ 85°c Operation : -10~60°c
Mechanical	Housing Material: PC UL94V-0 with optional color : White, Red, Yellow, Blue, Black
	Insert Material: PBT+30%GF UL94V-0
	PCB Material : FR-4 THICKNESS=1.6mm
	Contact Material : Phosphor Bronze stamp pin T=0.35mm
	IDC Contact Material : Phosphor Bronze T=0.50mm with tin plating
	Universal IDC for both 110 & Krone tool
	568A and 568B wiring options
	Wire : AWG 23~26
Retentiveness of insertion structure : 50N 60±5s	

Ordering Information for Cat6 Keystone Jack:

Part Number	Description
IB-CAT6-JK	CAT6 UTP Keystone Jack