


## SC ADAPTER

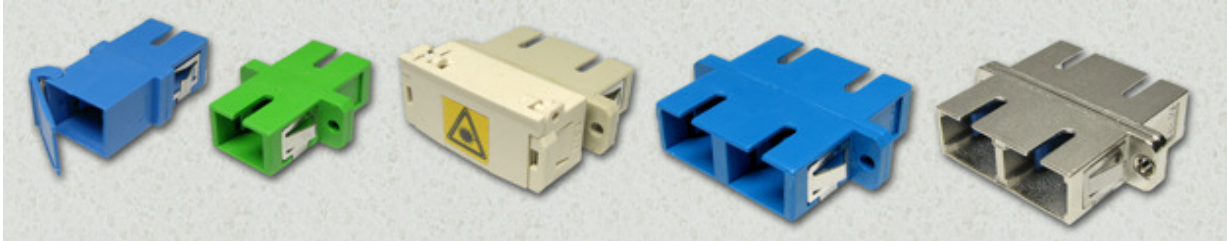

### APPLICATIONS

- CATV
- Metro
- Telecommunication networks
- Local Area Networks (LANs)
- Test equipment
- Data processing network

### FEATURES

- Low insertion loss and back reflection loss
- High precision alignment
- Compact design
- With/without flange
- Choice of housing material and sleeve material
- Telcordia, ANSI, TIA/EIA, NTT and JIS compliance

### AVAILABILITY

Metal housing	Plastic housing	Zirconia sleeve
PB sleeve	Simplex	Duplex
Shutter type	SC/PC	SC/APC

### SPECIFICATIONS

Insertion Loss	<0.20dB
Durability	<0.20 dB typical change, 1000 matings
Operating Temperature	-40 to + 85°C (PBT) / -25 to + 70°C (ABS)

### ORDERING OPTIONS

Housing Color	Housing Material	Sleeve Material	Channel	Application	Flange
Beige	Plastic	Zirconia	Simplex	SC/PC	With
Blue	Metal	PB	Duplex Quadplex	SC/APC	Without

## LC ADAPTER



### APPLICATIONS

- CATV
- Metro
- Telecommunication networks
- Local Area Networks (LANs)
- Test equipment
- Data processing networks

### FEATURES

- Low insertion loss and back reflection loss
- High precision alignment
- Compact design
- With/without flange
- Choice of housing material and sleeve material
- Telcordia, ANSI, TIA/EIA, NTT and JIS compliance

### AVAILABILITY

Metal housing	Plastic housing	Zirconia sleeve
PB sleeve	Simplex	Duplex
Shutter type	LC/PC	LC/APC

### SPECIFICATIONS

Insertion Loss	<0.20dB
Durability	<0.20 dB typical change, 1000 matings
Operating Temperature	-40 to + 85°C (PBT) / -25 to + 70°C (ABS)

### ORDERING OPTIONS

Housing Color	Housing Material	Sleeve Material	Channel	Application	Flange
Beige	Plastic	Zirconia	Simplex	LC/PC	With
Blue	Metal	PB	Duplex Quadplex	LC/APC	Without