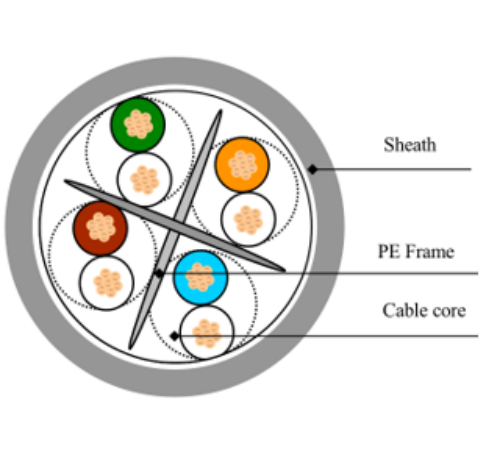


Cat6 UTP Patch Cord, PVC

Specification :

Conductor	Diameter (mm)	7*0.20mm	
Insulation	Material	HDPE	
	Diameter (mm)	0.97±0.05	
Core color	1 white-blue/blue	2 white-orange/orange	
	3 white-green/green	4 white-brown/brown	
Separator	PE CROSS		
Sheath	Material	PVC	
	Thickness (mm)	0.58±0.15	
	Diameter (mm)	6.00±0.50	
	Color	Grey, Blue, Red, Green, Yellow, Orange	
Surface printing	Letter high	2.0± 0.5mm	
	Color	Black or White	
	Print error & Space	≤± 0.5%, 1m	
Description			
Rated Temperature	75 °C		
Flame test	CM Rated		
Application	Telephone and other communication circuits such as voice, data, and audio for on-premise customer system		
Electrical Characteristics			
Electrical Characteristics (DC,20°C)	≤89 Ω/km		
Min. Insulation Resistance	≥ 100M Ω.km		
Dielectric Strength	AC-500V/1 Min		
The maximum length to pass test fluke channel and patch cord	10 meter		
Mechanical Characteristics			
Maximum Tensile Strength of Jacket (kgf/mm2)	1.05		
Elongation(%)	≥100		
The product is compliant with the limits of RoHS Directive 2011/65/EU			

Standards :

- ANSI/TIA/EIA-568C.2
- ISO/IEC 11801
- EN 50173

Ordering Information :

Part No.	Description	Jacket
IB-CAT6-PC-XX-YY	CAT6 UTP PATCH CORD	PVC

Remarks: XX = Color, Black=BK, Blue=BL, Grey=GY, White=WH, Purple=PL, Orange=OR
YY = Length, 1M=01, 5M=05, 10M=10

