




Fiber Optical Wall-mount Terminal Box (IB-WMB-MB)

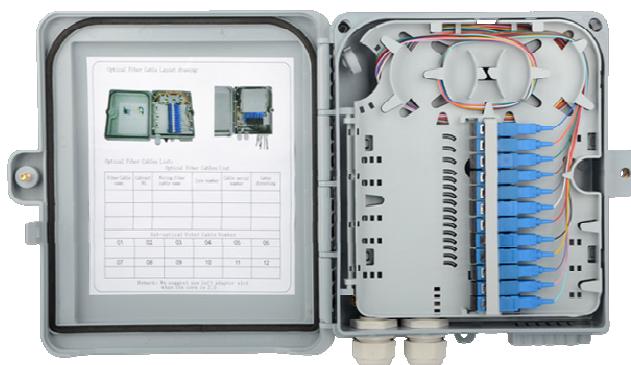

Description

- Applicable in FTTx project
- Max. 12 x SC adapters or 12 x Duplex LC adapters
- Suitable for corridor, basement, indoor and outdoor environment
- With the function of mechanical splice, fusion splice and wiring distributions
- 1 inlet ports, 6 outlet ports
- IP65 standard

Application

- ◆ FTTH access network
- ◆ Telecommunication Networks
- ◆ CATV Networks
- ◆ Data communications Networks
- ◆ Local Area Networks



Mechanical data

Model	Capacity	Size (mm)
IB-WMB-MB	Max . 12 Core Simplex SC or 12 Core Duplex LC	230(L) x 210(W) x 70(H)

Ordering information

Part No.	Description
IB -WMB-MB-6DXLC	12Core Fiber Optical Wall-mount Terminal Box with 6 X LC duplex adapters
IB -WMB-MB-12DXLC	24Core Fiber Optical Wall-mount Terminal Box with 12 X LC duplex adapters
IB -WMB-MB-6DXLC-P	12Core Fiber Optical Wall-mount Terminal Box with 6 X LC duplex adapters and pigtails
IB -WMB-MB-12DXLC-P	24Core Fiber Optical Wall-mount Terminal Box with 12 X LC duplex adapters and pigtails