


## LC/PC 12-Color Fiber Pigtails

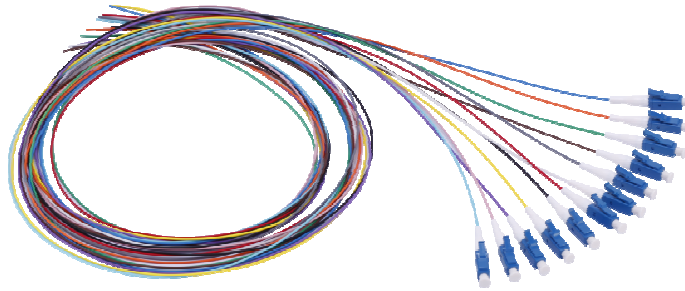

### APPLICATIONS

- Gigabit Ethernet
- Telecommunication networks
- Active device termination
- Video
- Industrial
- Multimedia
- Premise installations

### FEATURES

- High temperature stability
- Good exchangeability
- Good Durability
- Low insertion loss and back reflection loss

### SPECIFICATIONS

	Single mode – G657A2, OS2	Multimode – OM4
Core diameter	9.0 ± 0.5	50 ± 2.5
Attenuation	@1310nm ≤0.35dB @1550nm ≤0.20dB	@850nm ≤2.3dB @1300nm ≤0.6dB
Zero Dispersion Wavelength	≥1302, ≤1322nm	1295 – 1320 nm
Cladding Diameter	125 ± 0.7 μm	125.0±1.0 μm
Cladding Non-Circularity	≤0.8%	≤1%
Coating Non-Circularity	≤6.0%	≤6.0%
Coating Diameter	242 ± 7 μm	245± 10 μm
Temperature range	-20 to 60°C	-20 to 60°C

### ORDERING INFORMATION

Part Number	Description
IB-LC-12CP-SMA2-1.5	LC/PC 12-Color Singlemode G657A2 OS2 pigtails, 900um, 1.5M
IB-LC-12CP-OM4-1.5	LC/PC 12-Color Multimode OM4 pigtails, 900um, 1.5M